

LED PUCK INDUSTRIE LICHT

SPECIFICATION SHEET

SNAP SOLO ASYMMETRICAL BEAM

SNAP FEATURES A PATENTED DESIGN WITH A COLLAPSIBLE THREAD. WITH ONE EASY PUSH, THE MODULE SNAPS SECURELY INTO THE RAIL. REMOVAL IS ONLY POSSIBLE WITH A UNIQUE EXTRACTION TOOL. SNAP SOLO FEATURES AN INTEGRATED HEAT SINK FOR INSTALLATION IN A RANGE OF ALTERNATE HANDRAIL MATERIALS SUCH AS TIMBER.



SOL-VA-C-NW SNAP SOLO ASYMMETRICAL CURVED NEUTRAL WHITE POLYCARBONATE

SOL-VA-CF-WW SNAP SOLO ASYMMETRICAL CURVED WARM WHITE POLYCARBONATE

SOL-VA-C-NW-B SNAP SOLO ASYMMETRICAL CURVED NEUTRAL WHITE BOROSILICATE

SOL-VA-CF-WW-BSNAP SOLO ASYMMETRICAL CURVED WARM WHITE BOROSILICATE

SOL-VA-FF-NW SNAP SOLO ASYMMETRICAL FLAT NEUTRAL WHITE POLYCARBONATE

SOL-VA-FF-WW SNAP SOLO ASYMMETRICAL FLAT WARM WHITE POLYCARBONATE

SOL-VA-FF-NW-B SNAP SOLO ASYMMETRICAL FLAT NEUTRAL WHITE BOROSILICATE

SOL-VA-FF-WW-BSNAP SOLO ASYMMETRICAL FLAT WARM WHITE BOROSILICATE

TECHNICAL

1.4W / 500mA / 2.8Vf
3000.K - 168lm / 4000.K - 178lm
Ra80+ / 3 STEP MACADAM ELLIPSE

OPTICS

LENS PC - IP65 IK10
BOROSILICATE - IP67

PROTECTION CLASS

IK10
IP65

MATERIAL

316 STAINLESS STEEL

AMBIENT OPERATING CONDITIONS

MIN. -40../ MAX. 55...

ELECTRICAL

COOLSPLICE CONNECTOR


APERTURE

15mm, OR
15mm + (27mm x 1.6mm) COUNTERBORE


INSTALLATION

MIN. 1.5mm WALL THICKNESS
MIN. 36mm DIAMETER
CURVED OR FLAT MOUNTING SURFACE


SNAP SOLO VA CF CURVED FACE DETAIL



SNAP SOLO VA FF FLAT FACE DETAIL



SNAP VA ASYMMETRICAL DISTRIBUTION FOR VERTICAL MOUNTING.

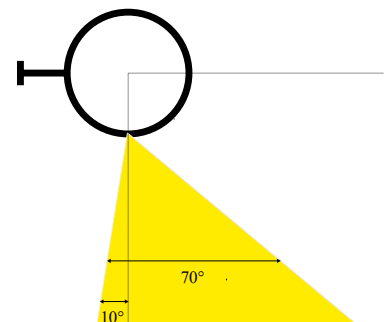


SPECIFICATION SHEET

POLAR DIAGRAMS

SNAP SOLO VA IS AN ASYMMETRICAL DISTRIBUTION FOR VERTICAL MOUNTING IN THE UNDER SIDE OF A HANDRAIL. SNAP VA IS AVAILABLE IN A RANGE OF STANDARD DISTRIBUTIONS AND SPECIAL ANGLES ON REQUEST.

SNAP SOLO VA 30
ASYMMETRICAL BEAM 3000.K

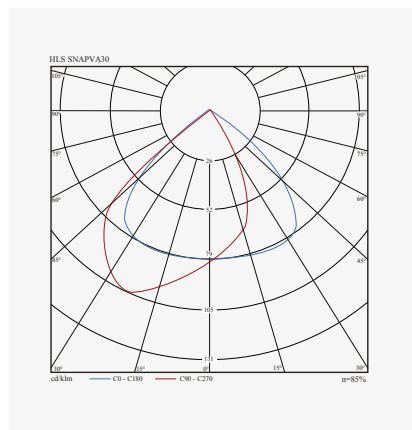

SNAP SOLO VA 40
ASYMMETRICAL BEAM 4000.K

